STREAMIT

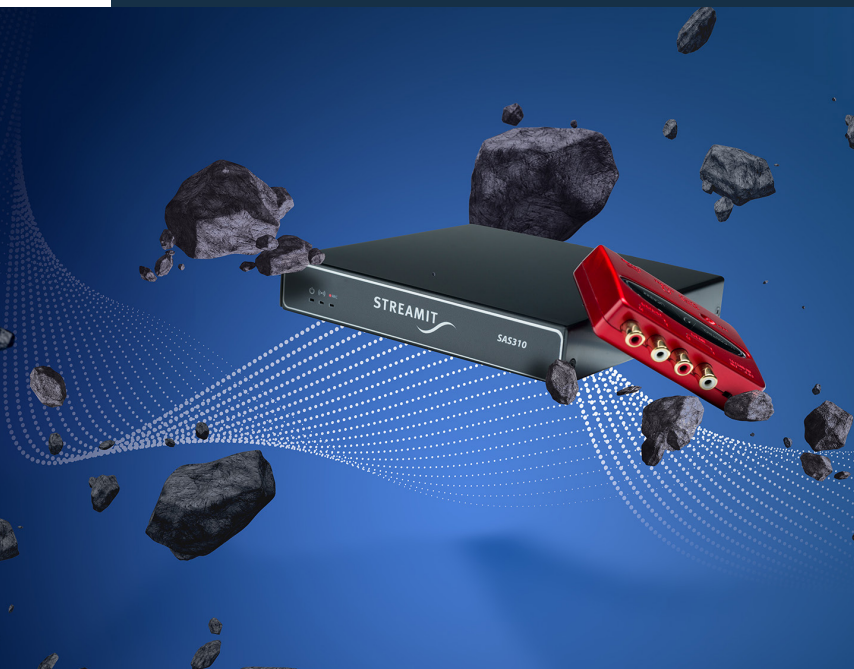# Streamit SAS310

Reliable audio streamer

QUALITY LIVE STREAMING AND RECORDING FOR AUDIO

Streamit SAS310

Quality live streaming and recording for audio.

The SAS310 is an easy-to-use audio encoder and streamer. Whether you are looking to broadcast a live event, a radio show or (safety) training for the work-floor, the SAS310 effortlessly makes the stream available for listening directly off the SAS310 or for distribution via large streaming facilities (Icecast and SHOUTcast). This makes the SAS310 suitable for clubs, schools, universities, local radio stations, place of worship, and conference centers.

The recording functionality enables you to make the event available on-demand from your own website. The integrated SSD storage is good for more than 400 hours of recordings at 64kbps.

The external USB audio interface (Behringer UCA222) features stereo RCA input connectors and comes with a headphones output for signal monitoring.

An intuitive web interface makes the configuration of the SAS310 very easy, it gives clear status and system information. Any web browser will do.
The SAS310 works autonomously, and once configured it does not require a PC or browser.

Automatic recovery after power or network failures make it an excellent and reliable network device.

external USB audio interface

Features

- Live audio encoding and streaming in MP3
- Local recording of the audio stream
- Stand-alone recorder application possible
- Easy configuration and monitoring through built-in web interface
- Streaming to Icecast and SHOUTcast
- Built-in Icecast streaming media server
- Supports remote control using commands over IP

Included in box

- SAS310
- Power adapter
- USB audio interface
- Ethernet cable
- Quickstart guide (EN/NL)

Get in touch with us if you have any questions about our products or if you would like a free demo. We are happy to help you and your customers with a rock-solid audio stream.

ROCK SOLID AUDIO SOLUTIONS

+31 40 255 6036   info@streamit.eu

STREAMIT.EU

STREAMIT

Technical specifications

Specifications

Size & weights

Size device (w x d x h mm)	165 x 155 x 25,5
Size of packaging (w x d x h mm) Weight (g)	230 x 170 x 95 435
Total weight in packaging (g)	1091

Technical details

Audio encoder	MP3
Sample frequency	11 - 44.1 kHz
Audio bit rate	16 - 256 kbps

Internal Icecast server	yes
Storage capacity	12GB
Ethernet controller	10/100/1000 Mbps
Configuration interface	English
Power adapter	100-240VAC/ 12VDC-2A

Input

Audio RCA	Unbalanced (UCA222)
Input impedance	24 kohm
Max input level	2dBV

Output

Ethernet	RJ45
Headphone	1/8" TRS stereo jack
Output impedance	50 ohm
Max output level	-2 dBu, 2x3,7 mW @100 ohm

Power consumption

Stand by (typical W)	< 10W
Operation (typical W)	< 10W

See more on
https://www.streamit.eu/sas310-audio-streamer/ **or scan the QR:**